

## LIGHT LIQUID SEPARATOR ECODEPUR<sup>®</sup> DEPUROIL<sup>®</sup> NS3

## TECHNICAL INFORMATION


ECODEPUR<sup>®</sup> DEPUROIL<sup>®</sup> is Light Liquid Separator destined to clean water polluted with light free floating liquids such as engine oils, gas, oil etc, Class 1 in according of EN 858, with double coalescent cell and automatic closure device.



ECODEPUR<sup>®</sup> DEPUROIL<sup>®</sup> Separators has CE marking, in accordance with the legal obligations that stems from the entry into force of the Regulation (UE) N.º 305/2011 of Construction Products, fulfilling all the requisites of the European Standard EN 858-1:2002.

<b>EUROPEAN STANDARD</b>	EN 858-1
<b>EQUIPMENT IDENTIFICATION</b>	Light Liquid Separator
<b>MARCA</b>	ECODEPUR <sup>®</sup>
<b>TYPE</b>	DEPUROIL <sup>®</sup> NS3
<b>CLASS EN 858-1</b>	Class 1 (<5,0 mg "Mineral Oils"/l <sup>(1)</sup> )
<b>NOMINAL SIZE</b>	3 l/s
<b>COALESCENT CELL</b>	Double (lamellar/fibrillar)
<b>AUTOMATIC CLOSURE DEVICE</b>	Included (system always calibrated)
<b>VOLUME PRE-SLUDGE TRAP</b>	450 l
<b>OIL STORAGE</b>	940 l
<b>FIRE CLASS REACTION</b>	F
<b>MATERIAL</b>	Polyethylene
<b>VENTE POINT</b>	Included (1 1/2")
<b>COVER</b>	Polyethylene

<sup>(1)</sup> Teste conditions EN 858-1

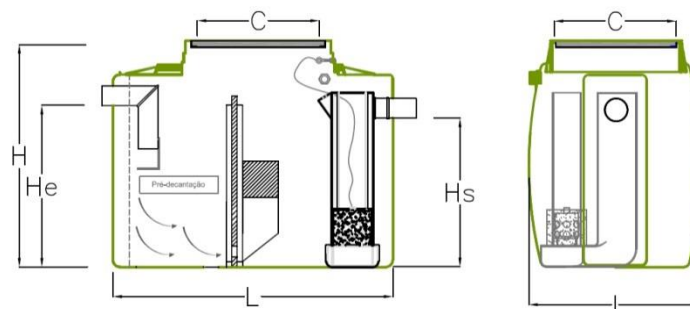

TYPE	NS (l/s)	VOLUME (l)	L (mm)	I (mm)	H (mm)	He (mm)	Hs (mm)	C (mm)	Ø PIPE (mm)
DEPUROIL <sup>®</sup> NS3	3,0	1.360	1.560	960	1.230	930	820	750 X 750	110

Rev\_2.07.11.22 | The pictures and dimensions can be changed without notice.